TECHNICAL DATA SHEET
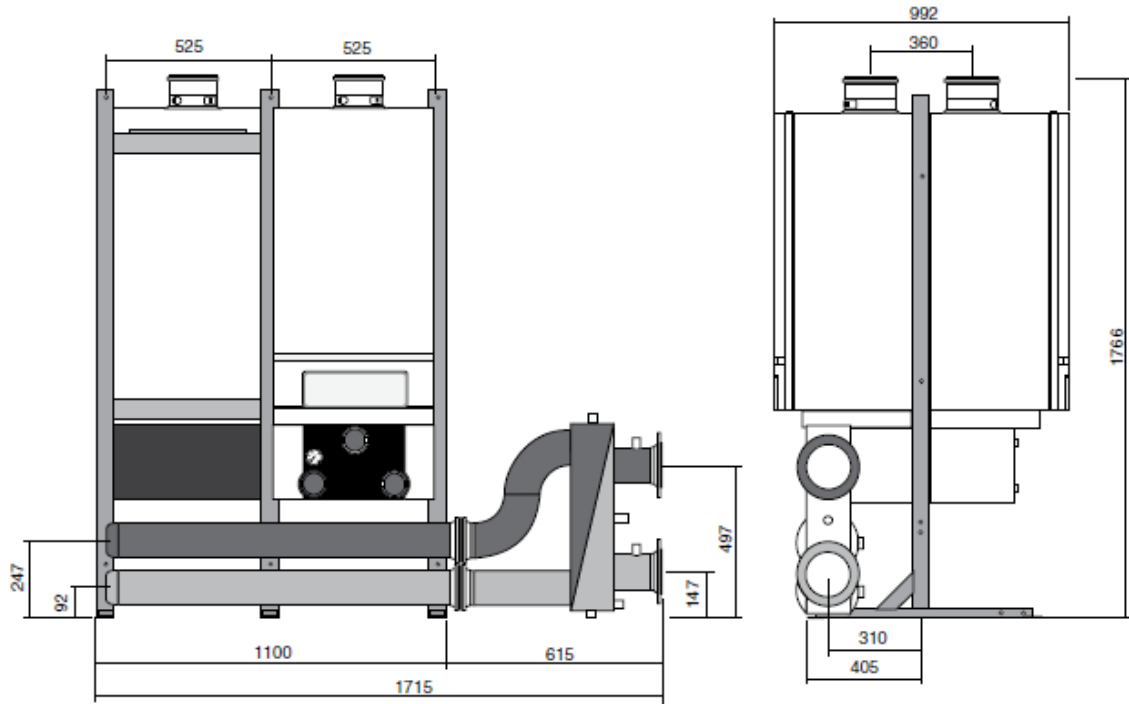
PRODUCT: Worcester GB162 Accessories

GB162 TR3 Cascade Frame Kit:

Specification	Unit	TR3 Configuration						
Capacity	kW	195	210	225	240	260	280	300
GB162 - 65		3	2	1	-	-	-	-
GB162 - 80		-	1	2	3	2	1	-
GB162 - 100		-	-	-	-	1	2	3
Low loss header size	Inch	3						
Flow & return flange connection	mm	80/88.9 PN6 37.2NW						
Main gas pipe connection	Inch	2						
Heating water volume flow @20K	m³/h	8.39	9.03	9.66	10.32	11.18	12.04	12.9
Max. gas consumption NG (G20)	m³/h	20.88	22.87	24.86	26.85	28.43	20.01	31.59
Max. gas consumption LPG (G31)	m³/h	6.90	7.50	8.10	8.70	9.30	9.90	10.50

Required Accessories	Quantity
Variable Speed Pump Group	3

Optional Accessories	Quantity
90° Bend set for 3" LLH	1

In addition to the above accessories, Worcester has a varying range of flue and control options available to suit the project requirements. Further information regarding these additional products can be obtained via your local sales contact, or alternatively via the commercial heating section of the Worcester website, http://www.worcester-bosch.co.uk/commercial